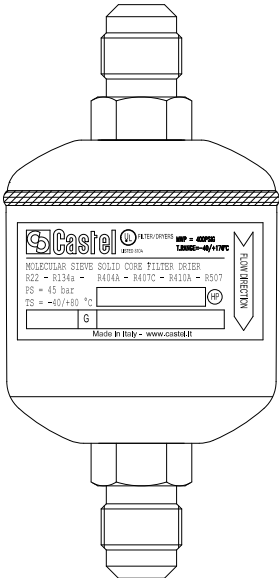


Filtri disidratatori a cartuccia solida 80% setaccio molecolare, 20% allumina - attacchi sae flare - omologati da underwriters laboratories inc.
 Dehydrator filters with solid core 80% molecular sieve, 20% alumina - sae flare connections - approved by underwriters laboratories inc.
 Filtres déshydrateurs avec cartouche solide 80% tamis moleculaire, 20% alumine - raccords sae flare - homologués par underwriters laboratories inc.
 Filtertrockner mit 80% molekularsieb, 20% aluminiumoxid - bördelanschlüsse - zugelassen von underwriters laboratories inc.

Disegno Drawing Dessin Zeichnung	N° Catalogo Part number N° Catalogue Katalog Nr	Codice internazionale International code Code international Internationaler code	Attacchi Connections Raccords Anschlüsse SAE Flare	Cubatura nominale Nominal volume Cubature nominale Nominaler rauminhalt [cm ³]	PS [bar]	TS [°C]		Confezione n° pz Package pcs Emballage Verpackung
						Min	Max	
	4203/2	032	1/4"	50	45 (1)	-40	+80	45
	4203/3	033	3/8"	50				45
	4205/2	052	1/4"	80				34
	4205/3	053	3/8"	80				34
	4208/2	082	1/4"	130				24
	4208/3	083	3/8"	130				24
	4208/4	084	1/2"	130				24
	4216/2	162	1/4"	250				28
	4216/3	163	3/8"	250				28
	4216/4	164	1/2"	250				28
	4216/5	165	5/8"	250				28
	4230/3	303	3/8"	500				12
	4230/4	304	1/2"	500				12
	4230/5	305	5/8"	500				12
	4232/4	304	1/2"	500				15
	4232/5	305	5/8"	500				15
	4241/5	415	5/8"	670				14
4241/6	416	3/4"	670	14				

Note:

(1)

MWP = 435 psi in conformità a omologazione UL per filtri serie 4203, 4205, 4216, 4232

MWP = 400 psi in conformità a omologazione UL per filtri serie 4208, 4230, 4241

(1)

MWP = 435 psi according to UL approval for filters series 4203, 4205, 4216, 4232

MWP = 400 psi according to UL approval for filters series 4208, 4230, 4241

(1)

MWP = 435 psi conformément à homologation UL pour filtres séries 4203, 4205, 4216, 4232
 MWP = 400 psi conformément à homologation UL pour filtres séries 4208, 4230, 4241

(1)

MWP = 435 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4203, 4205, 4216, 4232
 MWP = 400 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4208, 4230, 4241

Filtri disidratatori a cartuccia solida 80% setaccio molecolare, 20% allumina - attacchi a saldare - omologati da underwriters laboratories inc.
Dehydrator filters with solid core 80% molecular sieve, 20% alumina - solder connections - approved by underwriters laboratories inc.
Filtres déshydrateurs avec cartouche solide 80% tamis moleculaire, 20% alumine - raccords a souder - homologués par underwriters laboratories inc.
Filtertrockner mit 80% molekularsieb, 20% aluminiumoxid - lötlanschlüsse - zugelassen von underwriters laboratories inc.

Disegno Drawing Dessin Zeichnung	N° catalogo Part number N° Catalogue Katalog Nr	Codice internazionale International code Code international Internationaler code	Attacchi Connections Raccords Anschlüsse				Cubatura nominale Nominal volume Cubature nominale Nominaler rauminhalt [cm ³]	PS [bar]	TS [°C]		Confezione n° pz Package pcs Emballage Verpackung
			ODS		ODM				Min	Max	
			Ø [in.]	Ø [mm]	Ø [in.]	Ø [mm]					
	4203/2S	032S	1/4"	-	3/8"	-	45 (1)	-40	+80	45	
	4205/2S	052S		-		-				80	34
	4205/3S	053S	3/8"	-	1/2"	-				80	34
	4205/M10S	-	-	10	-	12				80	34
	4208/2S	082S	1/4"	-	3/8"	-				130	24
	4208/3S	083S	3/8"	-	1/2"	-				130	24
	4208/M10S	-	-	10	-	12				130	24
	4208/M12S	-	-	12	-	14				130	24
	4208/4S	084S	1/2"	-	5/8"	16				130	24
	4216/3S	163S	3/8"	-	1/2"	-				250	28
	4216/M10S	-	-	10	-	12				250	28
	4216/M12S	-	-	12	-	14				250	28
	4216/4S	164S	1/2"	-	5/8"	16				250	28
	4216/5S	165S	5/8"	16	3/4"	-				250	28
	4230/3S	303S	3/8"	-	1/2"	-				500	12
	4230/4S	304S	1/2"	-	5/8"	16				500	12
	4230/5S	305S	5/8"	16	3/4"	-				500	12
	4232/4S	304S	1/2"	-	5/8"	16				500	15
	4232/5S	305S	5/8"	16	3/4"	-				500	15
	4241/5S	415S	5/8"	16	3/4"	-				670	14
4241/6S	416S	3/4"	-	7/8"	-	670	14				
4241/7S	417S	7/8"	-	1.1/8"	-	670	14				

Note:

(1)
MWP = 435 psi in conformità a omologazione UL per filtri serie 4203, 4205, 4216, 4232, 4275
MWP = 400 psi in conformità a omologazione UL per filtri serie 4208, 4230, 4241

(1)
MWP = 435 psi according to UL approval for filters series 4203, 4205, 4216, 4232, 4275
MWP = 400 psi according to UL approval for filters series 4208, 4230, 4241

(1)
MWP = 435 psi conformément à homologation UL pour filtres séries 4203, 4205, 4216, 4232, 4275
MWP = 400 psi conformément à homologation UL pour filtres séries 4208, 4230, 4241

(1)
MWP = 435 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4203, 4205, 4216, 4232, 4275
MWP = 400 psi in Übereinstimmung zur UL-Zulassung für Filter der Serie 4208, 4230, 4241