



Condensing unit
Voltage Code : XC

SILFH2480Z-XC


Low Temp. Commercial (BP)

220 - 240V 1~ 50 Hz

R452A / R404A / R448A / R449A

SILFH2480Z-XC

Conditions	Frequency	Nominal Cooling Capacity		Sound Power ISO3745 / ISO 3743-1
		Watts	BTU/h	
EN13215 / R452A	50 Hz	1210	4125	65 dBA
EN13215 / R404A	50 Hz	1468	5007	65 dBA
EN13215 / R448A	50 Hz	1066	3634	65 dBA
EN13215 / R449A	50 Hz	1065	3630	65 dBA

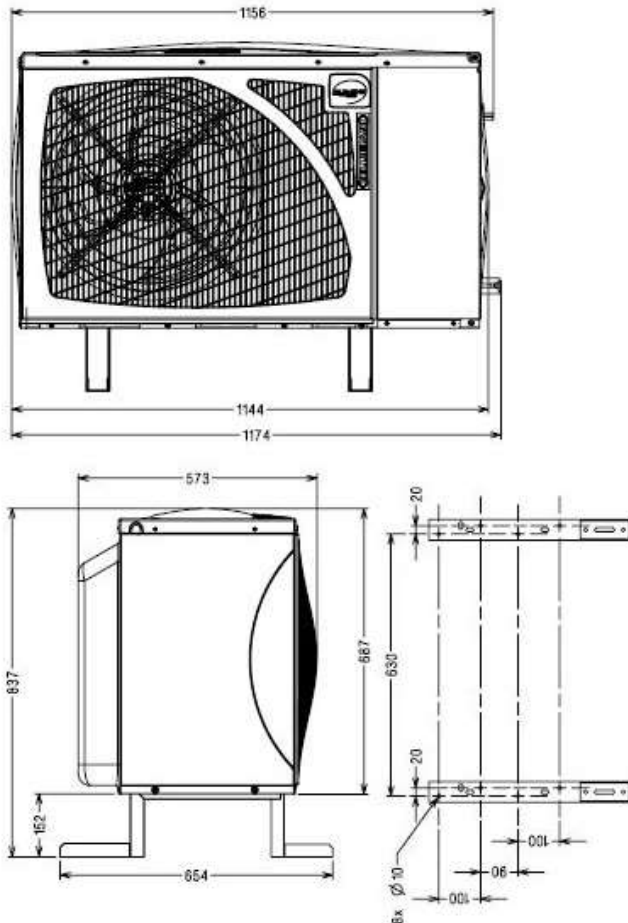

* EN13215 : T°Ambient 32.0°C / T°Evap. -35.0°C / T°Return gas temp.. 20.0°C
T°Subcooling. 3.0K

Net Weight (Kg)	69.0
Expansion device	Expansion_Valve
Air Flow (m³/h)	2700
Elec Comp Type	CSR
Current (Amp)	
Load Rated Amp	9.3
Max Cont Current	12.5
Lock Rotor Amp	65
Fan	
Speed (rpm)	830 / 900
Power (W)	56.0
Diameter (mm)	360
Protection	Overload
IP Level	IP44
Condenser	M360/14100
Liquid Receiver	
Capacity (L)	2.35
Maximum Pressure (Bars)	32.0
Suction Line	
Suction Type	Tube / Tube
For Tubing Out Diam	15.9 (5/8")
Suction Connection Type	Brased
Liquid Line	
Liquid Line Type	Tube
For Tubing Out Diam	9.5 (3/8")
Liquid Connecton Type	Brased
Connection Type	TT
Fan Guard	maille < à 8mm

Note : Tecumseh reserves the right to change information contained in this document without notification.



Tecumseh

SILFH2480Z-XC	Tension XC : 220 - 240V 1~ 50 Hz
----------------------	---

Les performances sont données dans les conditions EN13215 :	Gaz aspirés :	20.0 °C
Condition Dew	Sous refroidissement :	3.0 K
The performance data are in EN13215 conditions :	Return gas :	20.0 °C
Dew Condition	Subcooling :	3.0 K

50 Hz R452A									
N°User-234									
5 T ambience	6 T évaporation	(°C)	-40	-35	-30	-25	-20	-15	-10
25	1 P frigorifique	(Watt)	992	1437	1961	2565	3251	4022	4886
	2 P absorbée	(W)	951	1167	1396	1642	1907	2195	2504
	3 I absorbée	(A)	6.59	6.97	7.42	7.97	8.62	9.37	10.2
	4 Tc	(°C)	28.3	29.9	31.9	34.3	36.9	39.6	42.2
32	1 P frigorifique	(Watt)	795	1210	1694	2250	2880	3588	4387
	2 P absorbée	(W)	909	1140	1387	1653	1940	2251	2587
	3 I absorbée	(A)	6.44	6.89	7.41	8.01	8.71	9.51	10.4
	4 Tc	(°C)	34.0	35.6	37.6	39.9	42.4	45.0	47.6
43	1 P frigorifique	(Watt)	492	856	1276	1754	2296	2910	3609
	2 P absorbée	(W)	805	1062	1337	1635	1957	2306	2683
	3 I absorbée	(A)	6.07	6.62	7.25	7.95	8.74	9.62	10.6
	4 Tc	(°C)	43.0	44.6	46.5	48.8	51.2	53.6	56.0

50 Hz R404A									
N°User-233									
5 T ambience	6 T évaporation	(°C)	-40	-35	-30	-25	-20	-15	-10
25	1 P frigorifique	(Watt)	1235	1711	2270	2910	3633	4439	5340
	2 P absorbée	(W)	1051	1270	1500	1745	2006	2285	2582
	3 I absorbée	(A)	7.23	7.56	7.97	8.48	9.10	9.82	10.6
	4 Tc	(°C)	28.9	30.5	32.5	34.8	37.3	39.8	42.3
32	1 P frigorifique	(Watt)	1025	1468	1983	2570	3230	3967	4794
	2 P absorbée	(W)	1024	1260	1509	1775	2060	2365	2689
	3 I absorbée	(A)	7.18	7.57	8.04	8.61	9.28	10.0	10.9
	4 Tc	(°C)	34.6	36.2	38.2	40.5	42.9	45.3	47.7
43	1 P frigorifique	(Watt)	697	1085	1529	2030	2590	3219	3932
	2 P absorbée	(W)	944	1207	1487	1788	2111	2458	2827
	3 I absorbée	(A)	6.98	7.47	8.03	8.69	9.43	10.3	11.2
	4 Tc	(°C)	43.8	45.3	47.3	49.4	51.7	53.9	56.1

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = ambient temperature 6 = evaporating temperature

Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.

Note : Tecumseh reserves the right to change information contained in this document without notification.

© 2020 Tecumseh Products Company
All rights reserved



Tecumseh

SILFH2480Z-XC	Tension XC : 220 - 240V 1~ 50 Hz
----------------------	---

Les performances sont données dans les conditions EN13215 :	Gaz aspirés :	20.0 °C
Condition Dew	Sous refroidissement :	3.0 K
The performance data are in EN13215 conditions :	Return gas :	20.0 °C
Dew Condition	Subcooling :	3.0 K

50 Hz R448A (*)

N°User-236

5 T ambience	6 T évaporation	(°C)	-30	-25	-20	-15	-10
25	1 P frigorifique	(Watt)	1783	2394	3105	3921	4845
	2 P absorbée	(W)	1302	1535	1784	2052	2342
	3 I absorbée	(A)	6.92	7.46	8.08	8.80	9.62
	4 Tc	(°C)	30.0	32.0	34.2	36.6	39.2
32	1 P frigorifique	(Watt)	1547	2116	2779	3539	4402
	2 P absorbée	(W)	1293	1547	1820	2114	2432
	3 I absorbée	(A)	6.90	7.50	8.18	8.96	9.83
	4 Tc	(°C)	35.8	37.7	39.8	42.2	44.8
43	1 P frigorifique	(Watt)	1172	1675	2260	2933	3700
	2 P absorbée	(W)	1244	1531	1841	2176	2539
	3 I absorbée	(A)	6.73	7.44	8.22	9.10	10.1
	4 Tc	(°C)	44.9	46.8	48.9	51.2	53.6

50 Hz R449A (*)

N°User-235

5 T ambience	6 T évaporation	(°C)	-30	-25	-20	-15	-10
25	1 P frigorifique	(Watt)	1781	2391	3100	3913	4834
	2 P absorbée	(W)	1302	1535	1785	2054	2346
	3 I absorbée	(A)	6.92	7.46	8.08	8.81	9.63
	4 Tc	(°C)	30.1	32.1	34.3	36.7	39.3
32	1 P frigorifique	(Watt)	1545	2112	2773	3530	4389
	2 P absorbée	(W)	1293	1547	1820	2115	2435
	3 I absorbée	(A)	6.90	7.50	8.19	8.96	9.84
	4 Tc	(°C)	35.9	37.8	40.0	42.4	44.9
43	1 P frigorifique	(Watt)	1169	1670	2252	2922	3685
	2 P absorbée	(W)	1243	1530	1841	2177	2541
	3 I absorbée	(A)	6.72	7.43	8.22	9.10	10.1
	4 Tc	(°C)	45.0	46.9	49.0	51.3	53.7

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = ambient temperature 6 = evaporating temperature

(*) Veuillez vous référer strictement aux Recommandations d'Utilisation et Bulletins Marketing Tecumseh du fait de la température de refoulement élevée pour les applications LBP.

(*) Due to very high discharge temperature especially on LBP conditions, please strictly refer to Tecumseh Guidelines & Marketing Bulletin when using this refrigerant.

Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.

Note : Tecumseh reserves the right to change information contained in this document without notification.

© 2020 Tecumseh Products Company
All rights reserved