

STFT - STN


Condensatori ad aria senza tubo per O.E.M.
Tubeless aircooled condensers for O.E.M.

STFT

Modello	Type	STFT	12118	14121	12218	16124	14221	18127	16224	12239	18227		
Capacità	Capacity	* ΔT 15K	W	470	665	745	925	1000	1235	1385	1565	1935	
Portata aria	Air quantity		m³/h	255	330	220	450	290	650	390	440	570	
Elettroventilatori	Fans		n° x Ø mm	1x 170	1x 200	1x 170	1x 230	1x 200	1x 254	1x 230	2x170	1x 254	
Superficie	Surface		m²	0,55	0,75	1,1	1	1,5	1,25	2	2,35	2,5	
Volume interno	Internal volume		dm³	0,13	0,18	0,26	0,25	0,36	0,3	0,5	0,56	0,6	
Dimensioni	Dimensions	A	mm	185	215	185	245	215	275	245	395	275	
		B	mm	184	214	184	244	214	274	244	184	274	
		C	mm	30	30	60	30	60	30	60	60	60	
Attacchi	Connections		Ø mm	8	8	8	8	8	8	8	8	8	
Peso	Weight		kg	0,88	1,19	1,77	1,54	2,38	1,93	3,07	3,6	3,86	

CF Convogliatore di plastica Plastic fan shroud

Modello	Type	CF	CF18	CF21	CF18	CF24	CF21	CF27	CF24	2xCF18	CF27	
		Ø mm	178	206	178	236	206	260	236	178	260	

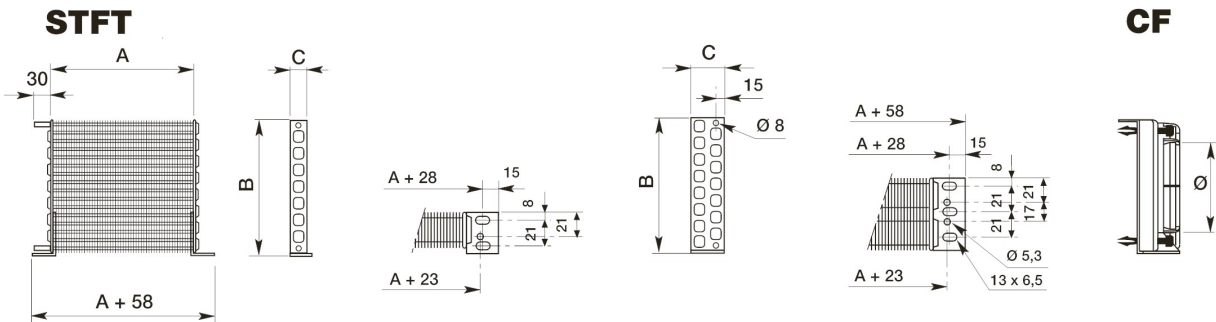


STN

Modello	Type	STN	6118	7121	6218	8124	9127	7221	7321	8224	9227		
Capacità	Capacity	* ΔT 15K	W	210	300	400	420	545	586	780	830	1025	
Portata aria	Air quantity		m³/h	260	345	240	520	690	320	290	480	640	
Elettroventilatori	Fans		n° x Ø mm	1x 170	1x 200	1x 170	1x 230	1x 250	1x 200	1x 200	1x 230	1x 250	
Superficie	Surface		m²	0,50	0,68	1,00	0,89	1,12	1,36	2,04	1,77	2,25	
Volume interno	Internal volume		dm³	0,05	0,07	0,10	0,09	0,11	0,13	0,20	0,17	0,22	
Dimensioni	Dimensions	A	mm	180	210	180	240	270	210	210	240	270	
		B	mm	184	214	184	244	274	214	214	244	274	
		C	mm	30	30	60	30	30	60	90	60	60	
Attacchi	Connections		Ø mm	8	8	8	8	8	8	8	8	8	
Peso	Weight		kg	0,72	1,08	0,94	1,18	1,45	2,18	1,88	2,36	2,82	

C Convogliatore di plastica Plastic fan shroud



Modello	Type	C	-	C21	-	C24	C27	C21	C21	C24	C27	
		Ø mm	-	210	-	240	265	210	210	240	265	

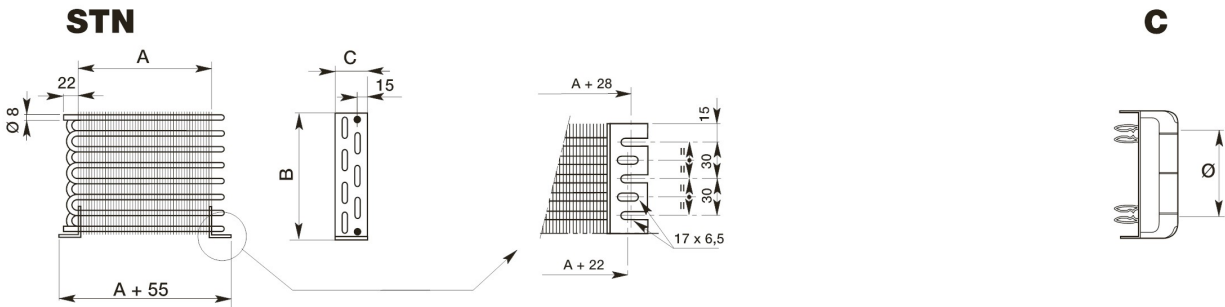



	14245	20233	16251	18257
	2085	2730	2770	3670
	580	900	780	1140
	2x200	1x275	2x230	2x254
	3,2	3,5	4,4	5,5
	0,75	0,78	0,97	1,22
	455	335	515	575
	214	304	244	274
	60	60	60	60
	8	8	8	8
	4,7	5,2	6,3	7,7

	2xCF21	CF33	2xCF24	2xCF27
	206	282	236	260



	8324	9327	9427
	1125	1415	1685
	440	590	550
	1x 230	1x 250	1x250
	2,66	3,37	4,49
	0,26	0,33	0,44
	240	270	270
	244	274	274
	90	90	120
	8	8	8
	3,54	4,72	-

	C24	C27	C27
	240	265	265

